

Flatglaze® Rooflights


Square, rectangular or circular rooflights with a sleek profile




Flatglaze® features & benefits

Flatglaze rooflights are the ideal choice for applications where the raised profile of conventional modular rooflights is not practical or desirable.

- Square, rectangular and circular rooflights available in a wide range of sizes
- Non Fragile in accordance with ACR[M]001:2005 and CWCT TN67
- Double glazed insulated units with low-e coating, complete with sandblasted perimeter frame as standard.
- Detailed specification is dependent on size and application.
- Clear or tinted glazing options.
- Extruded aluminium polyester powder coated frame, to any standard RAL colour.
- Installed to minimum 5° sloping timber kerb.
- Total product U-value as low as 1.4 W/m²k, exceeding the requirement for Part L compliance.
- Suitable for use with all popular flat roof finishes.
- Manufactured to order – 2 to 4 weeks delivery.
- 10 year guarantee.

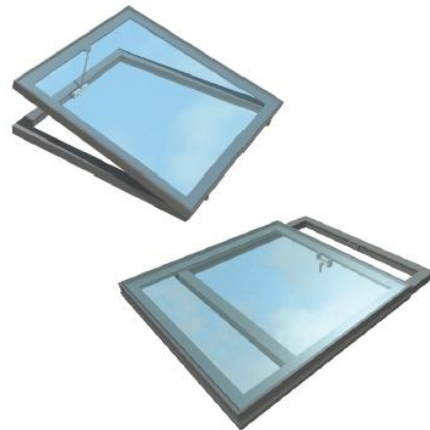

Flatglaze rooflights can be specified as slide-open or hinged units for ventilation or roof access

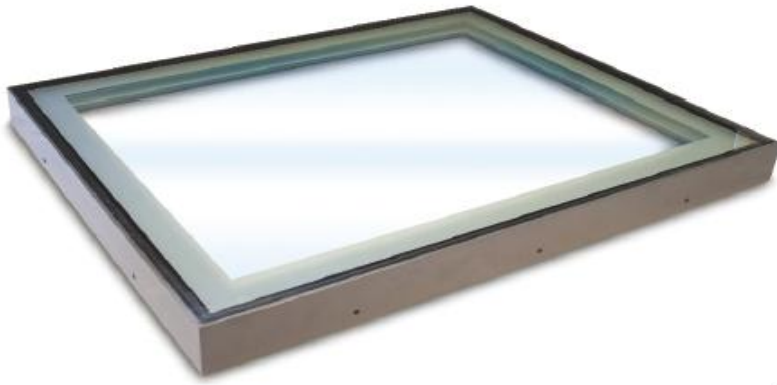

Square & rectangular rooflights

Flatglaze fixed square and rectangular units are available with glazing sizes up to 3.0m² with single glass panes. Larger sizes can be accommodated using transoms / glazing bars. Can also accommodate glazing for 'walk on' specification.



Circular rooflights

Flatglaze fixed circular units are available with glazing sizes up to 1.8m diameter with single glass panes. Larger sizes up to 8.0m diameter can be accommodated using transoms / glazing bars.

Opening options


Square or rectangular Flatglaze units can be specified as slide open or hinged units for ventilation or roof access. Hinged units may be operated manually or by electric actuator.



Sizing

When fitting to a builder's kerb, each Flatglaze unit is bespoke and manufactured to customers' exact requirements. All dimensions provided to Twinfix should be external.

In addition to our bespoke Flatglaze rooflights, we also offer a range of six standard sizes available with black powder coated outer frames.

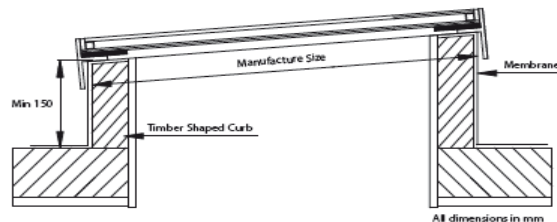

As our policy is one of continuous improvement, we reserve the right to change specifications without prior notice. All information, recommendations or advice (written or oral) given by Twinfix is given in good faith and to the best of our knowledge.

©June 2011